Product Specification Sheet

.355 Kerf

12364


This product is being offered as a potential replacement to Rochester's Urethane C21 / U21 QWS 21

Product Description: .355 kerf mount foam profile designed to fit a kerf slot with a width of .078" and minimum depth of .250".

Features: Seamless compression seals are nearly 100% closed cell to prevent water from penetrating foam cell structure. Extruded skin provides a unique UV resistant barrier with design features that enhance the weather strip's sealing performance.

Compression:
Recommended = 25% Minimum = 10% Maximum = 50%

Achieves AAMA 702 Class "A" Extra High Performance Certification

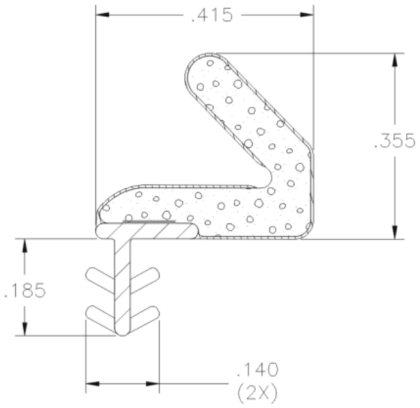

Profile	12364 —.355 KERF
Colors	Black, Bright White, Brown and Tan
Part Numbers and Descriptions	12364112091000 .355 KERF BLK CONT 12364112191000 .355 KERF BRT WHT CONT 12364111691000 .355 KERF BRN CONT 12364112591000 .355 KERF TAN CONT
Packaging and Box Quantities	1,000' per reel—2 reels per box (2,000' per box) Box dimensions 26 1/4" X 18 1/2" X 26 1/4" (H X W X L)
Pallet Quantities and Dimensions	8 boxes per pallet; 16,000' per pallet Pallet dimensions 58" X 40" X 54" (H X W X L)
Minimum Order Quantities	12,000' minimum total order quantity with a 6,000' minimum quantity per color
Samples	25' samples available for customer testing Colors swatches available upon request