



Product Specification Sheet

.260 Kerf
12365

*This product is being offered as a potential replacement to
Rochester's Urethane C38 / U38 QEZD 260*


Product Description: .260" kerf mount foam profile designed to fit a kerf slot with a width of .078" and minimum depth of .250".

Features: Seamless compression seals are nearly 100% closed cell to prevent water from penetrating foam cell structure. Extruded skin provides a unique UV resistant barrier with design features that enhance the weather strip's sealing performance.

Compression:

Recommended = 25% Minimum = 10% Maximum = 50%

Achieves AAMA 702 Class "A" Extra High Performance Certification

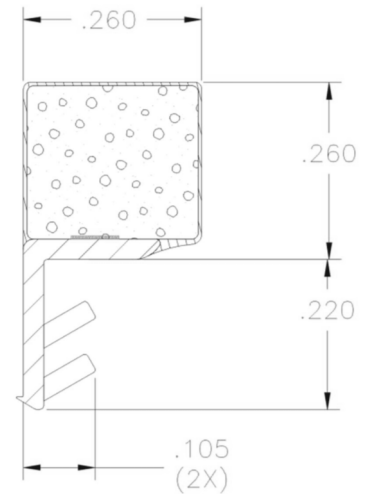

Profile	12365 —.260 KERF		
Colors	Black, Bright White, Brown and Tan		
Part Numbers and Descriptions	12365112091000	.260 KERF BLK CONT	
	12365112191000	.260 KERF BRT WHT CONT	
	12365111691000	.260 KERF BRN CONT	
	12365112591000	.260 KERF TAN CONT	
Packaging and Box Quantities	1,000' per reel—2 reels per box (2,000' per box)		
	Box dimensions 26 1/4" X 18 1/2" X 26 1/4" (H X W X L)		
Pallet Quantities and Dimensions	8 boxes per pallet; 16,000' per pallet		
	Pallet dimensions 58" X 40" X 54" (H X W X L)		
Minimum Order Quantities	12,000' minimum total order quantity with a 6,000' minimum quantity per color		
Samples			